




M10 MAVERICK
VARIABLE-OUTPUT DUAL-SWITCH LED FLASHLIGHT

USER MANUAL

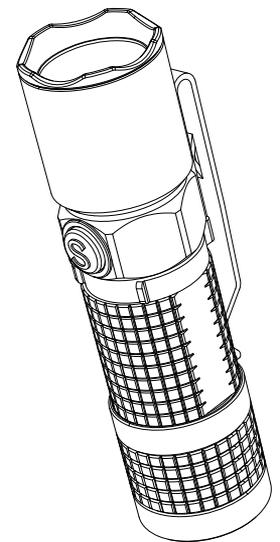

Thank you for purchasing the Olight M10 Maverick flashlight! Please read this manual carefully before using this product.

INSIDE THE BOX

M10 Maverick, (2) O-rings, (1) Silicon rubber boots, Lanyard, user manual

WARRANTY

Within 30 days of purchase: Return to retailer from which you purchased for repair or replacement.

Within 5 years of purchase: Return to Olight for repair or replacement.

This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an Authorized retailer or Olight itself.



Technical Support Inquiries
techsupport@olightworld.com

Customer Service
service@olightworld.com

Visit www.olightworld.com to see our complete product line of portable illumination tools.



Olight Technology Co., Limited
2/F East, Building A, B3 Block, Fuhai Industrial Park, Fuyong, Bao'an District, Shenzhen, China 518103

V1. MARCH 24, 2014

HOW TO OPERATE

ON/OFF: Click the tailcap switch to turn flashlight on.



CHANGE BRIGHTNESS LEVEL (FIG A)

Click the side switch when the light is on. The brightness levels will cycle up then repeats low – medium – high until level is selected.

STROBE: Triple half press the tailcap switch when light is off, or hold the side switch when the light is on.



LOCK OUT: (FIG B) Half turn the tailcap clockwise for lock out mode. The lock out mode will prevent the side switch and tailcap from turning on to prevent accidental activation.

UNLOCK: Turn tailcap counterclockwise until tight.

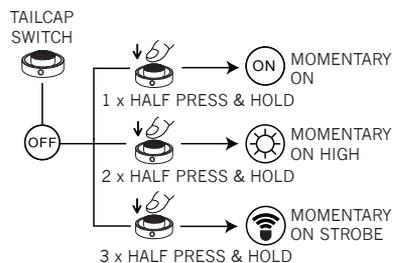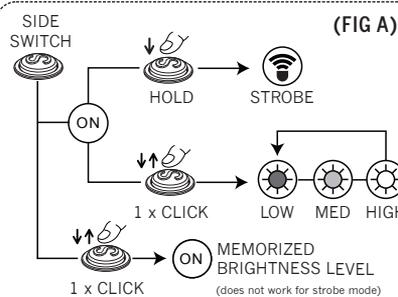

(FIG B)

TWIST A HALF TURN TO LOCKOUT

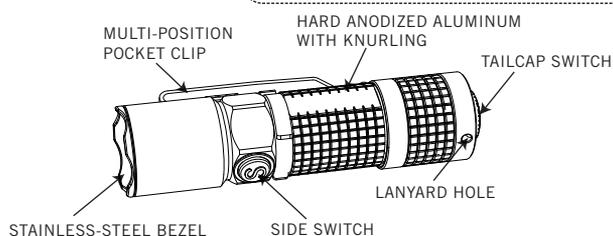

BATTERY INSTALLATION

Ensure batteries are inserted with the positive (+) end pointing to the head. The M10 Maverick will not operate with incorrectly inserted batteries.

SUPPORTED BATTERIES

- 1 x CR123A
- 1 x RCR123A


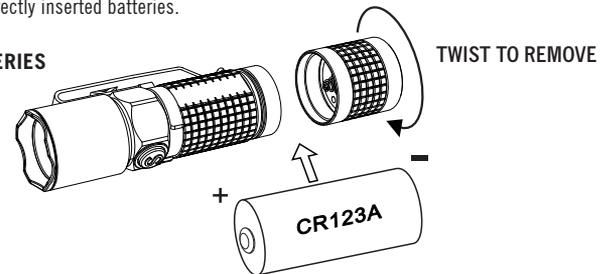


Figure 4 Output Vs Runtime

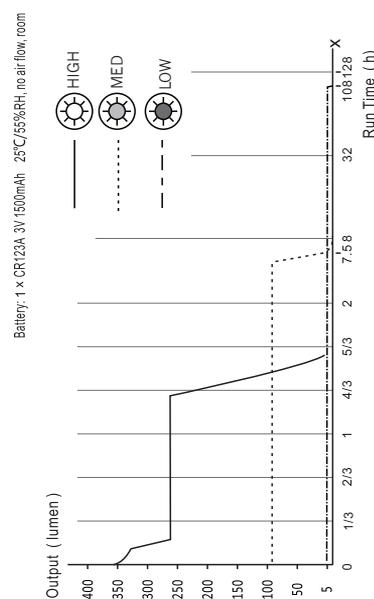

SPECIFICATIONS

OUTPUT & RUNTIME	
HIGH	350 LUMENS / 1.25 HRS
MED	80 LUMENS / 7.5 HRS
LOW	5 LUMENS / 4.5 DAYS
STROBE	350 LUMENS (10HZ) / 2.5 HRS
LED	CREE XM-L2
VOLTAGE	2.5V TO 4.2V
CANDELLA	2,880 CD
BEAM DISTANCE	107 METERS/ 427 FEET
BATTERY TYPE	1 x CR123A
BODY TYPE	TYPE III HARD ANODIZED ALUMINUM
WATERPROOF	IPX8 (UP TO 2 METERS)
IMPACT RESISTANCE	2 METERS
DIMENSIONS	L 93mm x D 23mm / 3.7 in x 0.91 in
WEIGHT	54.5g / 1.92 oz

Note: Testing with 1 piece of 3.0V 1,500mAh CR123A

All performance claims to ANSI/NEMA FL1-2009 Standard.